



'ഭരണഭാഷ - മാതൃ ഭാഷ'

കേരളാ സ്റ്റേറ്റ് ഡ്രഗ്സ് ആന്റ് ഫാർമസ്യൂട്ടിക്കൽസ് ലിമിറ്റഡ്
ഒരു കേരള സർക്കാർ സ്ഥാപനം

ഫാക്ടറി & ഓഫീസ്
കലവൂർ-688522, ആലപ്പുഴ, ഇൻഡ്യ
ഫോൺ : 0477-2258184, 2258828
ഫാക്സ് : 0477-2258162
ഇ-മെയിൽ : ksdpltd@gmail.com
വെബ്സൈറ്റ് : www.ksdp.co.in

KSDP/PRJ/QTN/2025-26/20

28/03/2026

QUOTATION NOTICE

Inviting Sealed Quotation for “Rust Removal and Repainting of Existing Fireline in Non Beta Plant at KSDP, Alappuzha.”

1. SCOPE OF WORK

“Rust Removal and Repainting of Existing Fireline in Non Beta Plant at KSDP, Alappuzha.
Details as per schedule attached.

2. TERMS OF PAYMENT

100% payment will be released after the completion of work.

3. PERIOD OF COMPLETION

All the work should be completed within 15 days from the date of issue of work order /
Handing over Site.

4. GENERAL CONDITIONS


1. Bidders are requested to visit site and study the requirement before quoting.
2. You should work as per the Rules & Regulations applicable to Employees of the company.
3. You should be responsible for the welfare and safety of the Men employed by you inside the company.
4. In case of dispute, jurisdiction will be Alleppey, Kerala.
5. All safety measures should be taken during work.
6. All materials, tools machines, scaffolding, and labours required for working is coming under the scope of contractor.

7. Your employees should wear all safety items/equipment such as helmet, goggles, safety belts, boots etc. Company will have no liability to employees entrusted by you with respect to safety measures.
8. GST will be paid extra as per actual.

IMPORTANT DATES :

Last Date of receipt of quotation , : **10-04-26 at 10:00 am.**
Sealed quotation opening date : **10-04-26 at 10:30 am.**

Please send your sealed quotation to Managing Director, Kerala State Drugs And Pharmaceuticals Ltd, Kalavoor, Alappuzha on or before 10.04.2026 at 10:00 am.

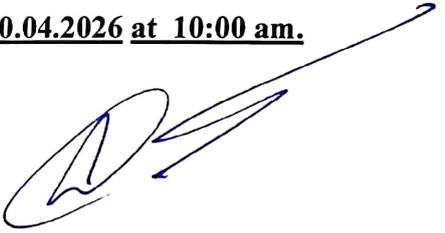

Deputy Manager (Projects)

KERALA STATE DRUGS AND PHARAMCEUTICALS LTD KALAVOOR, ALAPPUZHA**Rust Removal and Repainting for Fireline in Non Beta Plant****BOQ**

| SL.NO | DESCRIPTION | QTY | UNIT | RATE PER METRE IN RS. (Excl.GST) | TOTAL AMOUNT in RS. (Excl.GST) |
|--------------------|--|-----|------|----------------------------------|--------------------------------|
| 1 | Rust removal , surface preparation and repainting of 100mm to 150mm dia MS pipe with one coat of epoxy primer an 2 coats of enamel paint - red shade (including material and labour) | 175 | mtr | | |
| 2 | Rust removal , surface preparation and repainting upto 100mm dia MS pipe with one coat of epoxy primer an 2 coats of enamel paint - red shade (including material and labour) | 50 | mtr | | |
| GRAND TOTAL | | | | | |

*GST Extra as per actual or TDS will be deducted.

